

# BULLSEYE 3

***Increase your productivity and accuracy***



P R O S H O T™

***Magnetic mount option***

***Remote display option***


## **Specifications:**

Beam Reception:	360 degrees
Operating Range:	over 1500 ft. (460 m) radius (Dependent on laser)
Vertical Reception:	6.75" (171 mm)
Accuracy:	Fine: 3/16" (5 mm) Standard: 1/2" (12 mm) Wide: 1-1/4" (34 mm)
Display Output:	Bright or Dim
Power Options:	Alkaline - 4 x "C" Cell Nickel Metal Hydride "C" Cell Power Cable - 10-30 VDC
Battery Life - Alkaline:	75 Hours Dim, 50 Hours Bright
(Continuous) Ni-MH:	50 Hours Dim, 40 Hours Bright
Battery Recharge Time:	3 - 4 hours
Automatic Shut Off:	75 minutes with no laser beam
Out of Beam Indication:	On or Off
Shipping Dimensions:	19" x 16" x 7" (LxWxD)
(in carrying case)	(482 x 406 x 178 mm)
Shipping Weight:	12 lbs. (5.5 kg.)
Mounting Pipe:	1.66" to 2.00" O.D. round tube (42 mm to 50 mm) and 1-1/2" (38 mm) square tube
Operating Temperature:	-4° F to 140° F (-20° to 60° C)

- **360 Degree reception**  
Picks up the laser from all directions
- **Super-bright display**  
Easy to see in any light
- **Selectable accuracy**  
Set it for your job tolerances
- **Works on many machines**  
Use on excavators, dozers, backhoes
- **Use with all rotating lasers**  
Great with the L1-AS and *MAGNUM*
- **Remote display option**  
Add another display in your cab

# BULLSEYE 3

## Machine Control Receiver

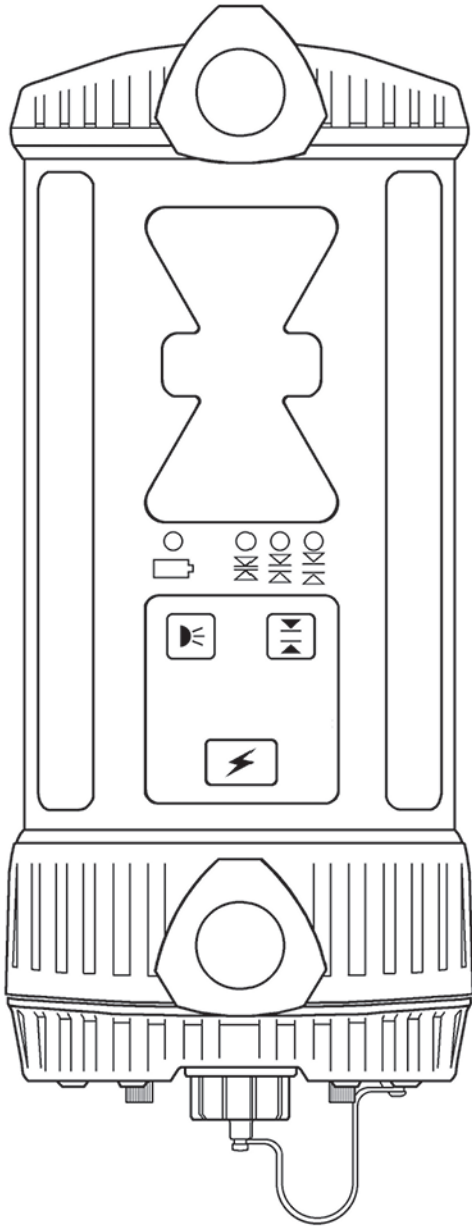

The Bullseye is a 360 degree laser receiver designed to mount on a dozer blade or on the stick of an excavator. The highly visible LED display provides 5 channels of information, high, high fine, on grade, low fine, and low. It allows grade checking from the operator's seat and eliminates the need for another person to stay with the machine as a grade checker. Grade staking cost is greatly reduced or eliminated and productivity is greatly increased. The receiver can provide up to a 2000' working range depending on the laser transmitter used.

The Bullseye can be mounted on 1.66" to 2.0" O.D. round tube, or 1 1/2" square tube.

The user can adjust the brightness of the display and the width of the on grade deadband. The unit runs on 4 C alkaline or can be preconfigured at the factory for NiMH rechargeable batteries. The Bullseye carries a 2 year warranty and is built by Apache Technologies.

- 
- Part Number 030-6000 - Bullseye 3 Receiver & Case
  - Part Number 030-6500 Bullseye 3 factory configured with NiMH rechargeable batteries & charger. Must be done at the factory prior to new equipment purchase. This cannot be added as a later upgrade. With Case.
  - Part Number 030-7500 Magnetic Mount
  - Part Number 030-8500 Remote Display with suction cup mount and cables.

151 Martinvale Lane • San Jose, CA 95119 • USA • Tel: 1.800.238.0685 • Fax: 1.408.361.3180



Contact Your Pro Shot™ Dealer Today: